


## TSL-BS□□□□-A

### Character:

1. high-strength epoxy resin, durable and difficult to wear, using fully enclosed design, dust-proof, waterproof. With built-in micro computer chip to achieve synchronized gradual or jumping colorful.
2. Working temperature: -40°C to +45°C
3. Grade of protection: IP65
4. Voltage: DC12V, 24V, AC110-240V


### Applications:

apply to the pedestrian street, plaza, pool, swimming pool, living area, sidewalks, gardens and stage decora

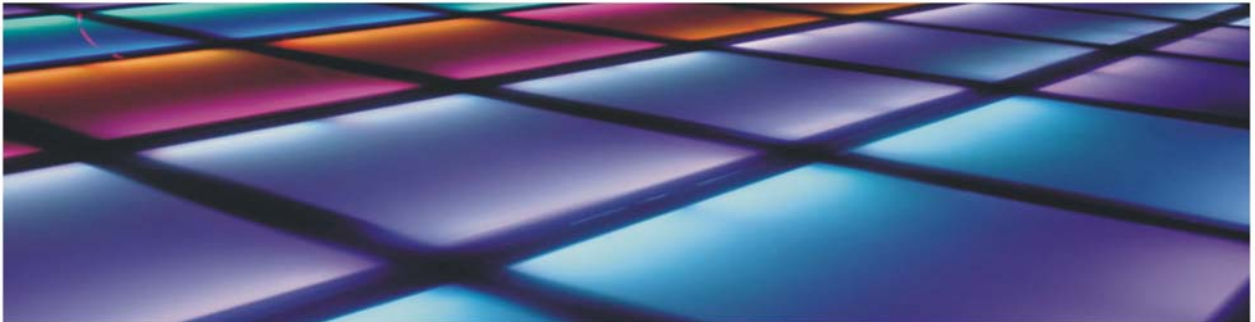

### Remarks:

All products can be customized according to customer requirements

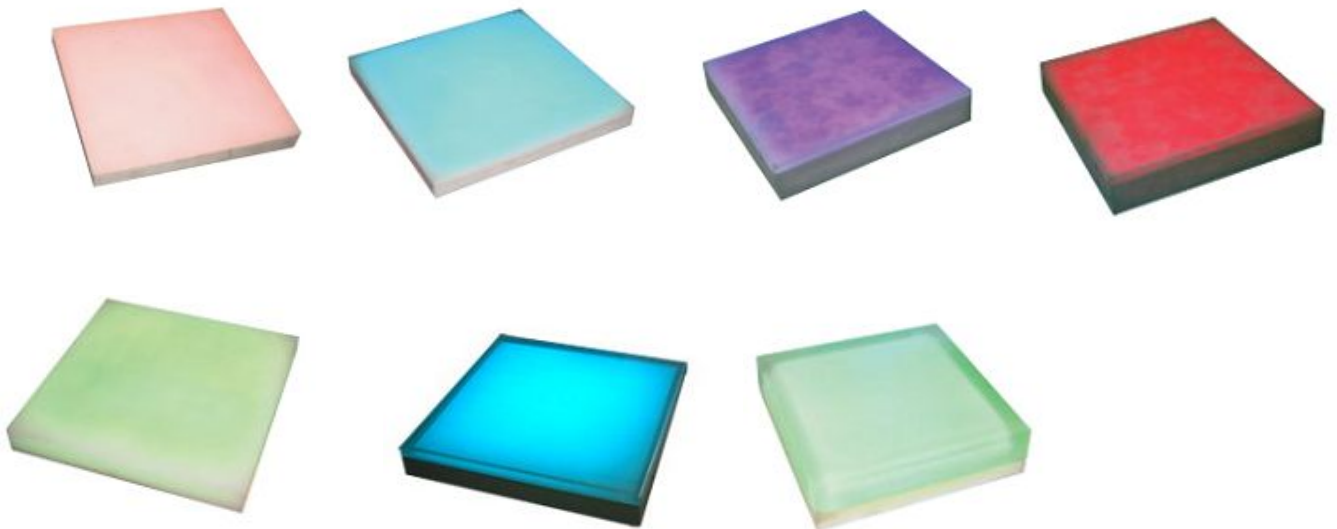

### Contents:

MODEL	SIZE(MM)	VOLTAGE	POWER	COLOR	MATERIALS
TSL-BS1010-A	100*100*50	AC12, 24V	2.2W	ALL COLOR	EPOXY RESIN
TSL-BS1515-A	150*150*50	AC12, 24V	3.8W	ALL COLOR	EPOXY RESIN
TSL-BS2020-A	200*200*50	AC12, 24V	5.4W	ALL COLOR	EPOXY RESIN
TSL-BS2525-A	250*250*50	AC12, 24V	8.5W	ALL COLOR	EPOXY RESIN
TSL-BS3030-A	300*300*50	AC12, 24VV	11.5W	ALL COLOR	EPOXY RESIN
TSL-BS4040-A	400*400*50	AC12, 24V	16W	ALL COLOR	EPOXY RESIN



TSL-BS□□□□-B

**Character:**

1. high-strength epoxy resin, durable and difficult to wear, using fully enclosed design, dust-proof, waterproof. With built-in micro computer chip to achieve synchronized gradual or jumping colorful.
2. Working temperature: -40°C to +45°C
3. Grade of protection: IP65
4. Voltage: DC12V, 24V, AC110-240V

**Applications:**

apply to the pedestrian street, plaza, pool, swimming pool, living area, sidewalks, gardens and stage decora



**Remarks:**

All products can be customized according to customer requirements



**Contents:**

MODEL	SIZE(MM)	VOLTAGE	POWER	COLOR	MATERIALS
TSL-BS1010-B	100*100*38	AC12, 24V	2.2-7.5W	ALL COLOR	EPOXY RESIN
TSL-BS1515-B	150*150*38	AC12, 24V	2.2-7.5W	ALL COLOR	EPOXY RESIN
TSL-BS2020-B	200*200*38	AC12, 24V	2.2-7.5W	ALL COLOR	EPOXY RESIN
TSL-BS2525-B	250*250*38	AC12, 24V	2.2-7.5W	ALL COLOR	EPOXY RESIN
TSL-BS3030-B	300*300*38	AC12, 24V	2.2-7.5W	ALL COLOR	EPOXY RESIN/ Marble
TSL-BS4040-B	400*400*38	AC12, 24V	2.2-7.5W	ALL COLOR	EPOXY RESIN/ Marble




**TSL-BS□□□□-C****Character:**

1. high-strength epoxy resin, durable and difficult to wear, using fully enclosed design, dust-proof, waterproof. With built-in micro computer chip to achieve synchronized gradual or jumping colorful.
2. Working temperature: -40°C to +45°C
3. Grade of protection: IP65
4. Voltage: DC12V, 24V, AC110-240V

**Applications:**

apply to the pedestrian street, plaza, pool, swimming pool, living area, sidewalks, gardens and stage decora

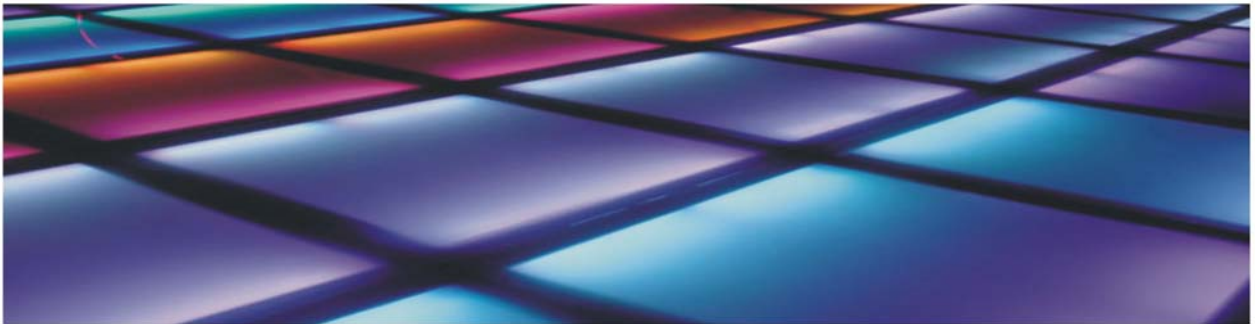**Remarks:**

All products can be customized according to customer requirements

**Contents:**

MODEL	SIZE(MM)	VOLTAGE	POWER	COLOR	MATERIALS
TSL-BS1010-C-R	100*100*60	AC12, 24V	2.1W	RED	CRYSTAL GLASS
TSL-BS1010-C-Y	100*100*60	AC12, 24V	2.1W	YELLOW	CRYSTAL GLASS
TSL-BS1010-C-B	100*100*60	AC12, 24V	2.1W	BLUE	CRYSTAL GLASS
TSL-BS1010-C-G	100*100*60	AC12, 24V	2.1W	GREEN	CRYSTAL GLASS
TSL-BS1010-C-W	100*100*60	AC12, 24V	2.1W	WHITE	CRYSTAL GLASS




## TSL-BR□□□

### Character:

1. high-strength epoxy resin, durable and difficult to wear, using fully enclosed design, dust-proof, waterproof. With built-in micro computer chip to achieve synchronized gradual or jumping colorful.
2. Working temperature: -40°C to +45°C
3. Grade of protection: IP65
4. Voltage: DC12V, 24V, AC110-240V

### Applications:

apply to the pedestrian street, plaza, pool, swimming pool, living area, sidewalks, gardens and stage decora

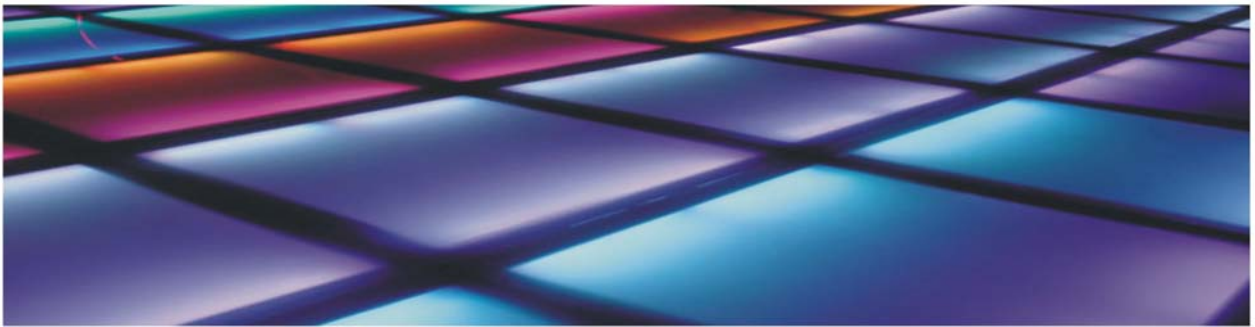

### Remarks:

All products can be customized according to customer requirements



### Contents:

MODEL	SIZE(MM)	VOLTAGE	POWER	COLOR	MATERIALS
TSL-BR300	Φ 300*38	AC12, 24V	2.2-5.0W	ALL COLOR	EPOXY RESIN
TSL-BR200	Φ 200*38	AC12, 24V	2.2-5.0W	ALL COLOR	EPOXY RESIN
TSL-BR150	Φ 150*35	AC12, 24V	2.2-5.0W	ALL COLOR	EPOXY RESIN




## TSL-BH□□□□-A

### Character:

1. high-strength epoxy resin, durable and difficult to wear, using fully enclosed design, dust-proof, waterproof. With built-in micro computer chip to achieve synchronized gradual or jumping colorful.
2. Working temperature: -40°C to +45°C
3. Grade of protection: IP65
4. Voltage: DC12V, 24V, AC110-240V

### Applications:

apply to the pedestrian street, plaza, pool, swimming pool, living area, sidewalks, gardens and stage decora

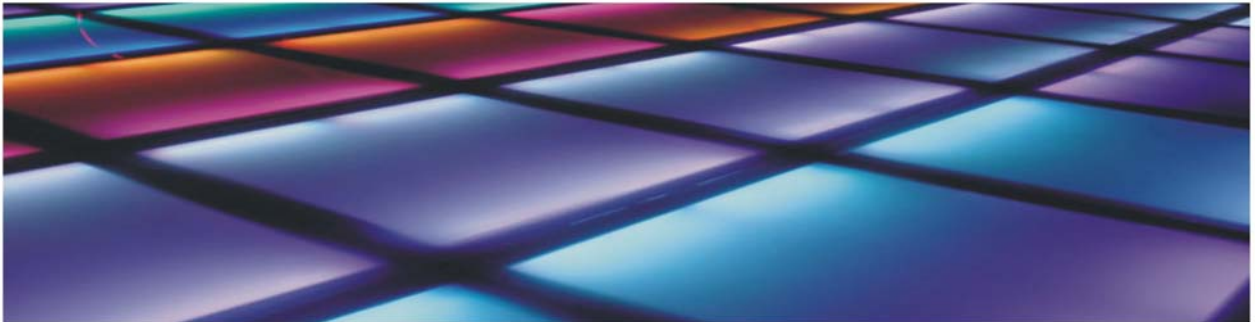

### Remarks:

All products can be customized according to customer requirements



### Contents:

MODEL	SIZE (MM)	VOLTAGE	POWER	COLOR	MATERIALS
TSL-BH345A	345*38	AC12, 24V	2.0-5.4W	ALL COLOR	EPOXY RESIN/ MARBLE
TSL-BH345B	345*50	AC12, 24V	2.0-5.4W	ALL COLOR	EPOXY RESIN/ MARBLE
TSL-BH300A	300*38	AC12, 24V	2.0-5.4W	ALL COLOR	EPOXY RESIN/ MARBLE
TSL-BH300B	300*50	AC12, 24V	2.0-5.4W	ALL COLOR	EPOXY RESIN/ MARBLE
TSL-BH245A	245*38	AC12, 24V	2.0-5.4W	ALL COLOR	EPOXY RESIN/ MARBLE
TSL-BH245B	245*50	AC12, 24V	2.0-5.4W	ALL COLOR	EPOXY RESIN/ MARBLE

